



CE-9807RRK JK WRANGLER & UNLIMITED REAR COIL SPRING RETAINER KIT INSTALLATION INSTRUCTIONS & TECHNICAL MANUAL



Fits

Fits: Rear of 2007-2018 Jeep JK Wrangler & Unlimited

Kit Includes

- | | |
|------------------------------------|--|
| (2) Upper Spring Retainer | (2) Lower Retainer Gold Washer |
| (2) Upper Retainer Tapered Bung | (2) 1/2"-13 x 1" Flanged Hex Head Bolt |
| (2) Upper Retainer Spacer | (2) 1/2"-13 Nut Plate |
| (2) 1/2"-20 x 2 3/4" Long Hex Bolt | |
| (2) 1/2" Flat Washer | |
| (2) 1/2"-20 Nyloc Nut | |




Instructions



- 1) Install the spring retainer bungs on the top side of the frame. On some models, it you may have to loosen the rear body mounts for additional clearance between the body and frame to install the spring retainer bung.



- 2) Install the spring retainer spacers inside the top spring rubber isolators.

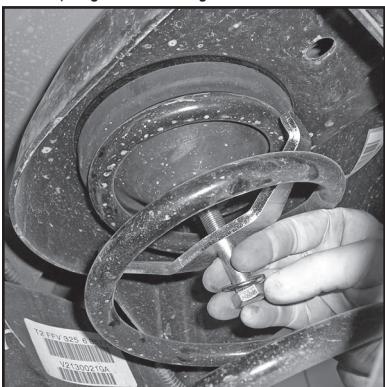

- 3) Install the upper spring retainer clamps using the 1/2"-20 x 2 1/2" bolts and 1/2" washers. Clamps must be 90 degrees to the end of the coil.



- 4) Take the 1/2"-20 nyloc nuts and the other two 1/2" washers, reach above the frame, and install them onto the 1/2" bolt previously installed in Step 3. Next, with a wrench on the top and a ratchet and socket on the bottom inside the spring, tighten the assembly.



- 5) Install the bottom spring retainers (3 1/2" OD x 1/2" ID washers) onto the rearend housing using the 1/2"-13 x 1" thread forming bolts, red Loctite, and the bottom spring retainer nut plates, and tighten. DO NOT over tighten the bolts! Only tighten them enough to secure the spring retainers to the housing. NOTE: Slight bending of the nut plates may be necessary for installation into the spring bucket due to the the variances stampings!